


Siemon CXP Passive Copper Assemblies

Siemon Interconnect Solutions CXP Copper Cable assemblies were developed for high-density applications, offering a cost-effective, low-power option for high-speed data center interconnects. The CXP form factor can replace up to three standard QSFP+ connections, providing greater density and reduced system cost. These direct attached assemblies support 12 channels of 10Gb/s (QDR) for 120Gb/s InfiniBand, or 10 channels of 10Gb/s for 100Gb/s (IEEE 802.3ba) and are available in standard lengths up to 4 meters with longer custom lengths available.

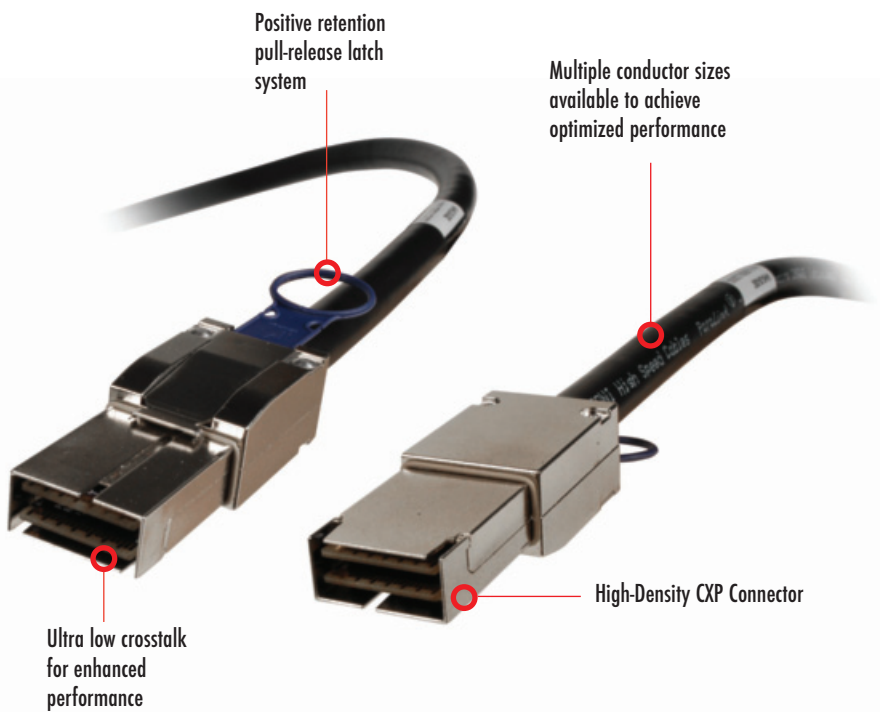

APPLICATIONS

- InfiniBand 12xSDR, 12xDDR, 12xQDR
- Ethernet 10G, 40G, 100G
- Rack-to-Rack, Shelf-to-Shelf Interconnect
- Networking, NIC
- Storage: DAS, SAN, NAS
- Hubs, switches, routers, servers

STANDARDS COMPLIANCE

- SFF-8642
- IBTA V2 Revision 1.3
- IEEE 802.3ba
- RoHS

Siemon CXP Passive Copper Assemblies

Performance Specifications:

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp Min/Signal Contact
General	
Operating Temperature	0 to 70 C (32 to 158 F)
Flammability Rating (Plastics)	UL 94
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part#, Date Code

Ordering Information:

CXP to CXP Passive Copper Cable Assemblies

Part Number	Length (Meters)	Gauge
CXP30-01	1	30
CXP30-02	2	30
CXP28-03	3	28
CXP27-04	4	27

Maximum Lengths:

Gauge	IBTA DDR (meters)	IBTA QDR (meters)	IEEE 802.3ba (meters)
30	4	2	2
28	6	3	3
27	7	3	3

CXP27-04 is not guaranteed to meet IBTA QDR or IEEE 802.3ba insertion loss requirements

Note: Contact customer service for additional lengths

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Plug	
Backshell Material	Nickel Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Plastic Material	Nylon
Latch	Positive Latching w/Pull Tab
Insertion Force	150N Max.
Withdrawal Force	50N Max.
Durability	250 Cycles
Tightest Recommended Horizontal Spacing	27.00 mm Center to Center
Tightest Recommended Vertical Spacing (Stacked)	16.50 mm Center to Center
Cable	
Conductor	Solid
Wire Gauge	30 AWG, 28 AWG and 27 AWG
Impedance	100 +/- 5 ohms
Construction	Twinaxial
Cable OD	30 AWG = 9.5mm (0.374 in.)
	28 AWG = 11mm (0.433 in.)
	27 AWG = 13.8mm (0.543 in.)
Jacket Type	PVC
Bend Radius	5X Cable OD -Single 10X Cable OD - Repeated

For additional resource information:

Visit our web site at www.siemon.com/SIS

Siemon Interconnect Solutions

Watertown, CT USA

Phone (1) 860 945-4213

E-Mail - Customer Service. - IS_customerservice@siemon.com

E-Mail - Technical Support. - IS_techsupport@siemon.com