


LC to MTP 4 X 10G HYBRID EQUIPMENT CORDS


Siemon's LC to MTP 4 X 10G Hybrid Equipment Cords have (1) MTP connector on one end and (4) duplex LC connectors on the other for connection to active equipment with LC ports used in aggregation of multiple 10G ports to one 40G port.

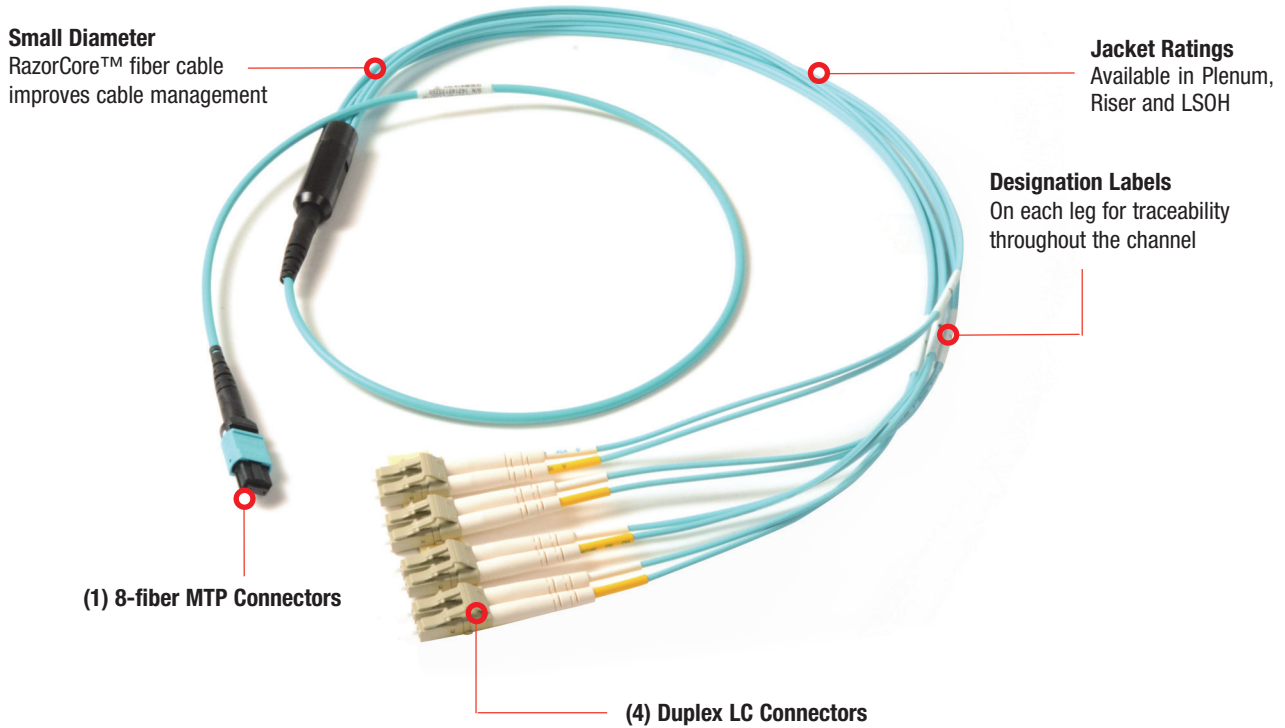

- Specifically wired to manage polarity for transmit to receive



40G to 4 X 10G Channel

Example Channel Model

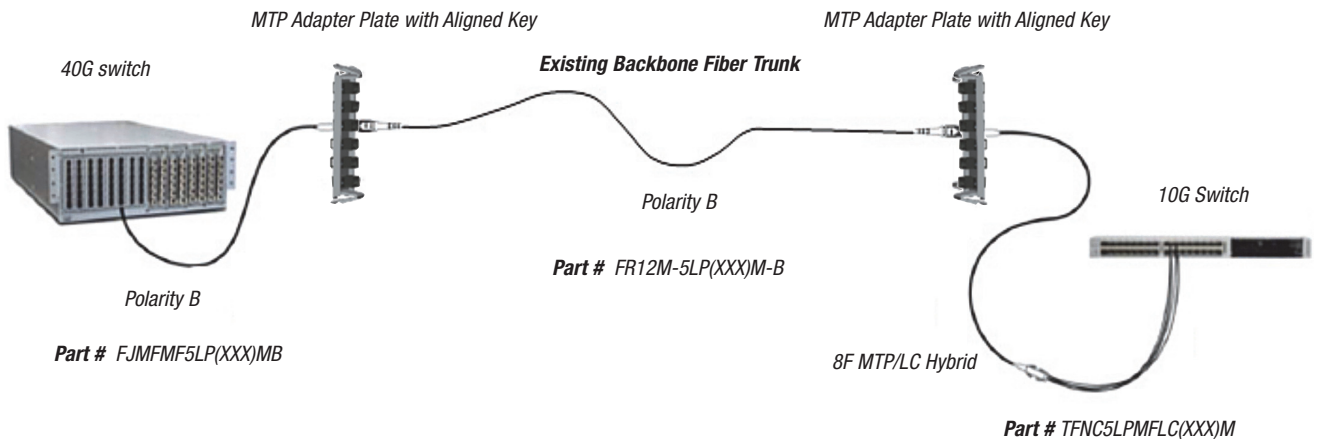

Ordering Information

LC TO MTP 4 X 10G HYBRID EQUIPMENT CORDS

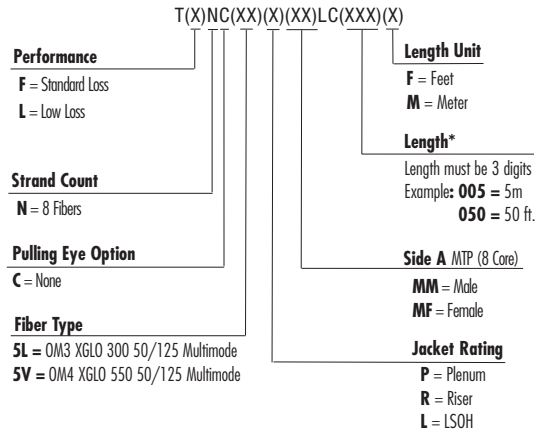

Product Specifications

STANDARD LOSS ASSEMBLIES

Fiber Type		MAX Insertion (dB)		MAX Return Loss (dB)		Performance Class
		MTP	LC	MTP	LC	
5L-MM	50/125 (OM3)	0.50	0.25	20	30	XGLO® 300
5V-MM	50/125 (OM4)	0.50	0.25	20	30	XGLO 550

LOW LOSS ASSEMBLIES

Fiber Type		MAX Insertion (dB)		MAX Return Loss (dB)		Performance Class
		MTP	LC	MTP	LC	
5L-MM	50/125 (OM3)	0.20	0.15	20	30	XGLO 300
5V-MM	50/125 (OM4)	0.20	0.15	20	30	XGLO 550

CABLE - OPTICAL AND PHYSICAL SPECIFICATIONS

Cable Type	Multimode	
	XGLO 50/125 OM3 (850/1300nm)	XGLO 50/125 OM4 (850/1300nm)
Fiber Cable Attenuation MAX (db/km)	3.0/1.0	3.0/1.0
LED Bandwidth, MIN (MHz/km)	1500/500	3500/500
Effective Modal Bandwidth, MIN (MHz/km)	2000	4700
Cable Outer Jacket, Color (Per TIA-598-C)	Aqua	Aqua

CONNECTORS - PHYSICAL SPECIFICATIONS

Connector Type	IEC Intermateability Compliance	TIA Intermateability Compliance	Housing Color	Boot Color
			MM-5L/5V	MM
MTP	IEC 61754-7	TIA/EIA-604-5	Aqua	Black

Worldwide Headquarters North America

Watertown, CT USA
 Phone (1) 860 945 4200 US
 Phone (1) 888 425 6165

Regional Headquarters EMEA

Europe/Middle East/Africa
 Surrey, England
 Phone (44) 0 1932 571771

Regional Headquarters Asia/Pacific

Shanghai, P.R. China
 Phone (86) 21 5385 0303

Regional Headquarters Latin America

Bogota, Colombia
 Phone (571) 657 1950